

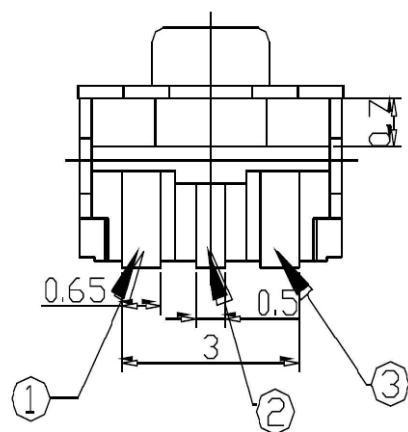
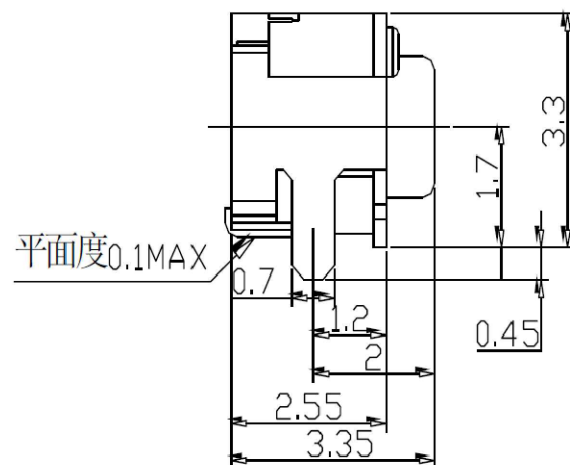


Circuit diagram

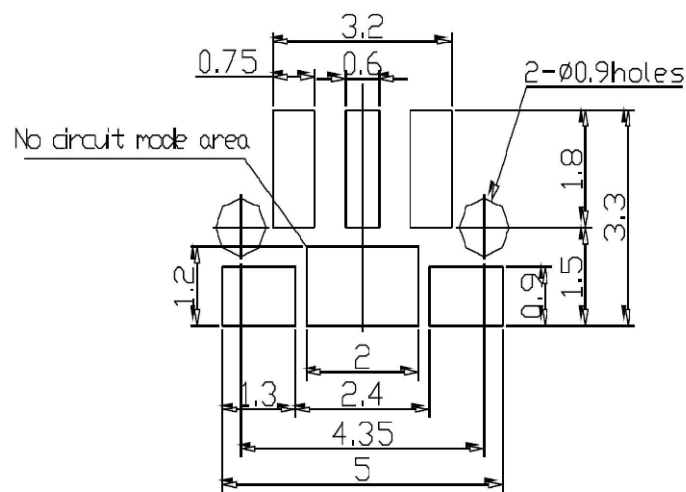

P.C.B. mounting
hole dimension

Item 项目	Components 零件部分	Material Article 材料
1	Stem 推柄	PPA 防火等级 HB
2	Cover 盖板	Brass(Ag Plating) 黄铜镀银 镍底0.2um银层≥0.2um.
3	Dome 簧片	SUS(Contact side silver plating) 不锈钢镀银 镍底0.2um 银层≥0.2um
4	Housing 本体	PPA 防火等级 HB
5	Terminal 端子	Brass(Ag Plating) 黄铜镀银 镍底0.2um银层≥0.2um.

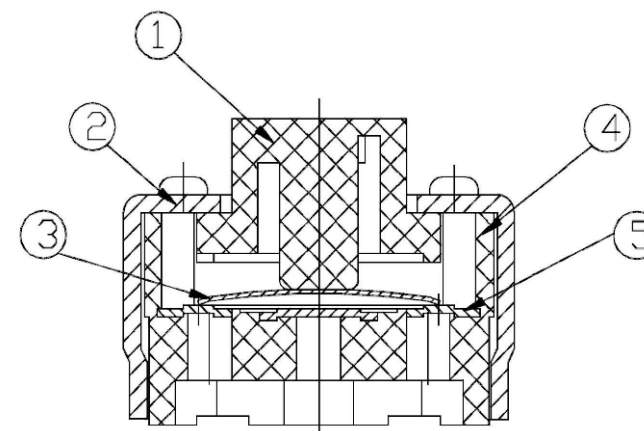

Rating	12VDC 50mA
Contact Resistance	500mΩ Max
Insulation Resistance	10MΩ Min
Dielectric Voltage	500VAC 60±5S
Endurance	100,000 cycles
Pre-travel	0.20±0.1mm
Operation force	160±50 gf
Terminal flatness	Solder before:0.08mm Max After welding:0.1mmMax